



电机



意大利制造




空心轴



实心轴 B3/B14



空心轴+内置弹性联轴器 三相 - 四级 (1450 RPM)

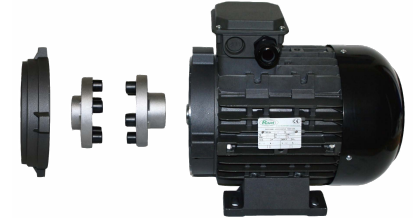

功率		电机中心高	法兰安装尺寸	编号	适用泵的型号
kw	hp				
50 HZ 电机 - B3 框架 - 空心轴 - 单相 - 四级 (1450 RPM)					
2.0	2.5	90	90mm	1045A	RC
2.0	2.5	90	90mm	TBA	RC, 配有开关、电线及插头
2.2	3.0	100	90mm	1130A	RC - RR - RS - XT
2.2	3.0	100	90mm	TBA	RC - RR - RS - XT, 配有开关、电线及插头
2.6	3.5	100	90mm	1341A	RC - RR - RS - XT
3.0	4.0	112	61mm	1562A	XM - RK
3.0	4.0	112	90mm	1333A	RS
3.0	4.0	112	90mm	1564A	RC - RR
50 HZ 电机 - B3 框架 - 空心轴 - 三相 - 四级 (1450 RPM)					
2.2	3.0	90	61mm	1828A	XM - RK - RG
4.0	5.5	100	61mm	1129A	XM - RK - RW - XW - RG
4.0	5.5	100	90mm	1149A	RC - RR - RS
4.0	5.5	100	90mm	TBA	RC - RR - RS, 配有开关、电线及插头
4.0	5.5	112	61mm	1242A	XM - RK - RW - XW - RG
5.5	7.5	112	61mm	1131A	XM - RK - RW - XW - RG
5.5	7.5	112	90mm	1559A	RC - RR
5.5	7.5	112	90mm	1147A	RS
6.2	8.5	112L	61mm	1334A	XM - RK - RW - XW - RG
6.2	8.5	112L	90mm	TBA	RC - RR
7.5	10.0	132S	61mm	1120A	RK - XW - RG
7.5	10.0	132S	90mm	1717A	RR
9.2	12.5	132L	61mm	1561A	RK - XW - XLW - SXW - RG
11.0	15.0	132L	61mm	1143A	RK - XW - XLW - SXW - SHP - RG
12.5	17.0	132L	61mm	1235A	RK - XW - XLW - SXW - SHP - RG
15.0	20.0	160S	61mm	1289A	XW - XLW - SXW - SHP
50 HZ 电机 - B3 框架 - 实心轴 - 三相 - 四级 (1450 RPM)					
15.0	20.0	160S	B3/B14	2087A	XW - XLW - SXW - SHP - RG
50 HZ 电机 - B3 框架 - 空心轴+内置弹性联轴器 单相 - 四级 (1450 RPM)					
3.0	4.0	112	61mm	TBA	XM-RK
3.0	4.0	112	90mm	TBA	XT-JR-RC-RR
50 HZ 电机 - B3 框架 - 空心轴+内置弹性联轴器 三相 - 四级 (1450 RPM)					
4.0	5.5	112	61mm	TBA	XM-RK
4.0	5.5	112	90mm	TBA	XT-RC-RR
5.5	7.5	112	61mm	TBA	XM-RK-RG-XW
5.5	7.5	112	90mm	TBA	RR
6.2	8.5	112	61mm	TBA	RK-RG-XW-XWL
6.2	8.5	112	90mm	TBA	RR
7.5	10	132S	61mm	TBA	RK-RG-XW-XWL
7.5	10	132S	90mm	TBA	RR
9.2	12.5	132M	61mm	TBA	RK-RG-XW-XWL-SXW-SHP
9.2	12.5	132M	90mm	TBA	RR
11.0	15	132M	61mm	TBA	RG-XW-XWL-SXW-SHP
11.0	15	132M	90mm	TBA	RR

以上所有电机表面呈深灰色并经过阳极化的处理。

以上所有电机均为绝缘等级 F - S1 - IP55