



HPE-M



铜泵头



铝合金连杆



铜材质连杆





电机频率



电机频率

126 Series

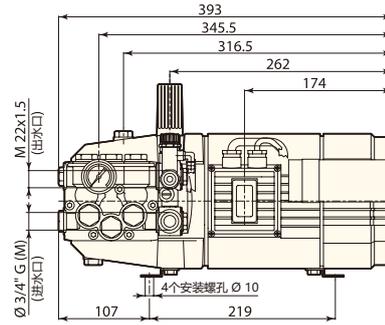

型号	流量		压力		电机功率		KG 重量	转速 rpm	温控阀 TRV	单相~50HZ		编号
	l/min	gpm	bar	psi	hp	kw				伏特	伏特	
HPE-M 1450 转												
□ HPE-M 02.08	2.0	0.52	80	1145	0.5	0.35	22.0	1450	无	230	230	22096
□ HPE-M 04.08	4.0	1.06	80	1145	1.0	0.7	22.0	1450	无	230	230	22097
□ HPE-M 06.08	6.0	1.58	80	1145	1.0	0.7	22.0	1450	无	230	230	22838
□ HPE-M 08.08	8.0	2.11	80	1145	1.8	1.35	22.0	1450	无	230	230	22098
□ HPE-M 11.07	11	2.90	70	1015	2.2	1.65	22.0	1450	无	230	230	22895
□ HPE-M 13.06	13	3.43	60	870	2.2	1.65	22.0	1450	无	230	230	22896