



铝合金连杆  
CONNECTING-RODS  
IN ALUMINIUM



铜泵头  
BRASS HEAD


RS



## 276 Series

标配内置调压阀

Built-in unloader Valve

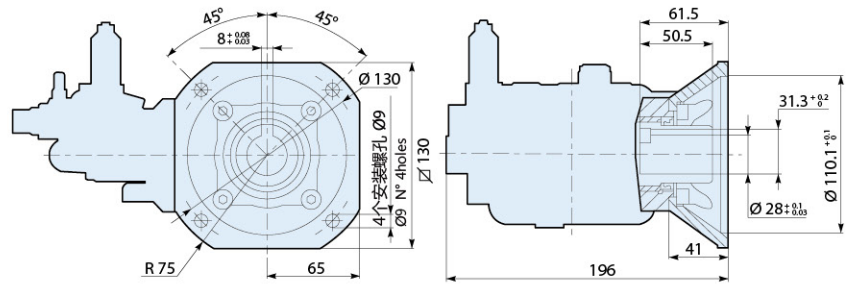

型号	流量		压力		电机功率		KG 重量	转速	温控阀	进水口	出水口	易启动	皂液嘴	编号
	l/min	gpm	bar	psi	hp	kw	kg	rpm	TRV					
<b>RS 1450 转 C 轴 28mm 实心轴 + F16 法兰 - 适用于电机 MEC 100-112</b>														
RS 11.18C+F16	11	2.90	180	2600	5.5	4.0	7.0	1450	无	3/8"GF	3/8"GM	无	有	<b>25967</b>
RS 13.17C+F16	13	3.43	170	2500	6.0	4.5	7.0	1450	无	3/8"GF	3/8"GM	无	有	<b>TBA</b>
RS 15.15C+F16	15	4.00	150	2200	6.0	4.5	7.0	1450	无	3/8"GF	3/8"GM	无	有	<b>23474</b>

Model	Flow		Pressure		Power		KG Weight	转速 RPM	TRV	Inlet	Outlet	EZ Start	Injection	Code
	l/min	gpm	bar	psi	hp	kw	kg	rpm	TRV					
<b>RS 1450 RPM C Version 28mm hollow shaft with flange F16 for el. motors MEC 100-112</b>														
RS 11.18C+F16	11	2.90	180	2600	5.5	4.0	7.0	1450	No	3/8"GF	3/8"GM	No	Yes	<b>25967</b>
RS 13.17C+F16	13	3.43	170	2500	6.0	4.5	7.0	1450	No	3/8"GF	3/8"GM	No	Yes	<b>TBA</b>
RS 15.15C+F16	15	4.00	150	2200	6.0	4.5	7.0	1450	No	3/8"GF	3/8"GM	No	Yes	<b>23474</b>