



铜泵头
BRASS HEAD



铝合金连杆
CONNECTING-RODS
IN ALUMINIUM



铜材质连杆
CONNECTING-RODS
IN BRONZE




RSV



276 Series

标配内置调压阀

Built-in unloader Valve

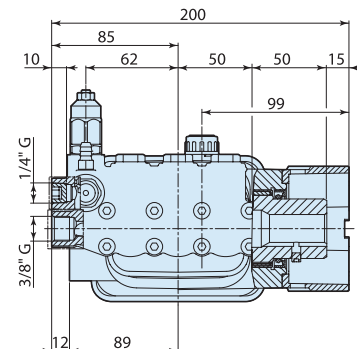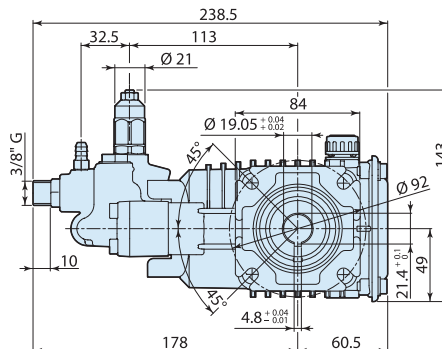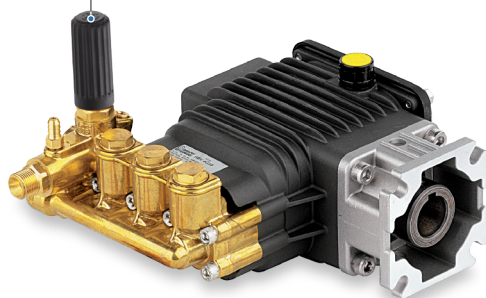

型号	流量 l/min gpm	压力 bar psi	汽油机功率 hp kw	重量 kg	转速 rpm	温控阀 TRV	进水口	出水口	易启动	皂液嘴	编号
RSV 2.5G25D+F25	9.5 2.50	170 2500	5.5 4.0	7.0	3400	有	3/8"GF GHA(NH 3/4"F)	3/8"GM QC	有	有	23831 26599
RSV 3G30D+F25	11.4 3.00	206 3000	6.5 4.7	7.0	3400	有	3/8"GF GHA(NH 3/4"F)	3/8"GM QC	有	有	24420 23989 23570

Model	Flow l/min gpm	Pressure bar psi	Power hp kw	Weight kg	RPM	TRV	Inlet	Outlet	EZ Start	Injection	Code
RSV 2.5G25D+F25	9.5 2.50	170 2500	5.5 4.0	7.0	3400	Yes	3/8"GF GHA(NH 3/4"F)	3/8"GM QC	Yes	Yes	23831 26599
RSV 3G30D+F25	11.4 3.00	206 3000	6.5 4.7	7.0	3400	Yes	3/8"GF GHA(NH 3/4"F)	3/8"GM QC	Yes	Yes	24420 23989 23570