




类型	N mm	O mm	Q 螺纹
1	25	20	M8
2	34	27	M8
3	78	43	M8

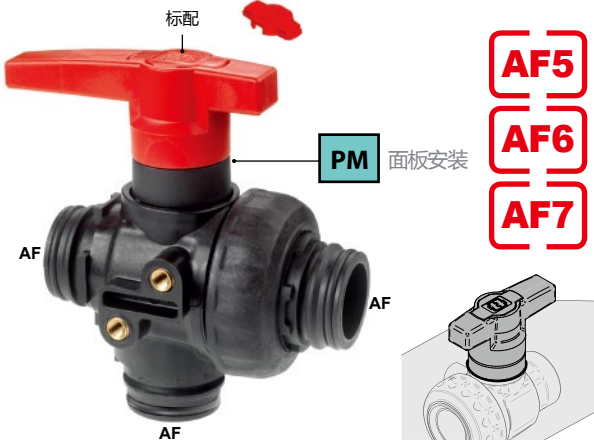

开关流量

编号	螺纹规格	手柄	°C	bar	类型	件/箱
8216256	G 1"	MF	LL	60 ⇄ 16	1	10
8216311	G 1"1/4	MF	LL	60 ⇄ 10	1	10
8216361	G 1"1/2	MF	LL	60 ⇄ 10	2	10
8216411	G 2"	MF	LL	60 ⇄ 10	3	10
8216313	G 1"1/4	MF	LC	60 ⇄ 10	1	10
8216363	G 1"1/2	MF	LC	60 ⇄ 10	2	10
8216413	G 2"	MF	LC	60 ⇄ 10	3	10

M= 外螺纹 F=内螺纹 LL= 长手柄 LC= 短手柄

持续流量

编号	螺纹规格	手柄	°C	bar	类型	件/箱
8216257	G 1"	MF	LL	60 ⇄ 16	1	10
8216312	G 1"1/4	MF	LL	60 ⇄ 10	1	10
8216362	G 1"1/2	MF	LL	60 ⇄ 10	2	10
8216412	G 2"	MF	LL	60 ⇄ 10	3	10
8216314	G 1"1/4	MF	LC	60 ⇄ 10	1	10
8216364	G 1"1/2	MF	LC	60 ⇄ 10	2	10
8216414	G 2"	MF	LC	60 ⇄ 10	3	10


M= 外螺纹 F=内螺纹 LL= 长手柄 LC= 短手柄

持续流量

STD	PM	 						
编号	编号	AF	手柄	°C	bar	类型	件/箱	
8216703	8218703	5 MM	LL	60 ⇄ 10	1	10		
8216753	8218753	6 MM	LL	60 ⇄ 10	2	10		
8216803	8218803	7 MM	LL	60 ⇄ 8	3	10		
8216706	-	5 MM	LC	60 ⇄ 10	1	10		
8216756	-	6 MM	LC	60 ⇄ 10	2	10		
8216806	-	7 MM	LC	60 ⇄ 8	3	10		

PM = 面板安装 M=外快接头 LL= 长手柄 LC= 短手柄

开关流量

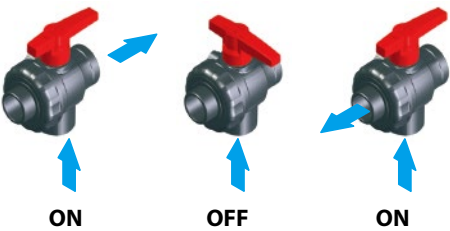

持续流量

