

液压驱动 418 Series

NEW


新品



铜材质连杆



铜泵头

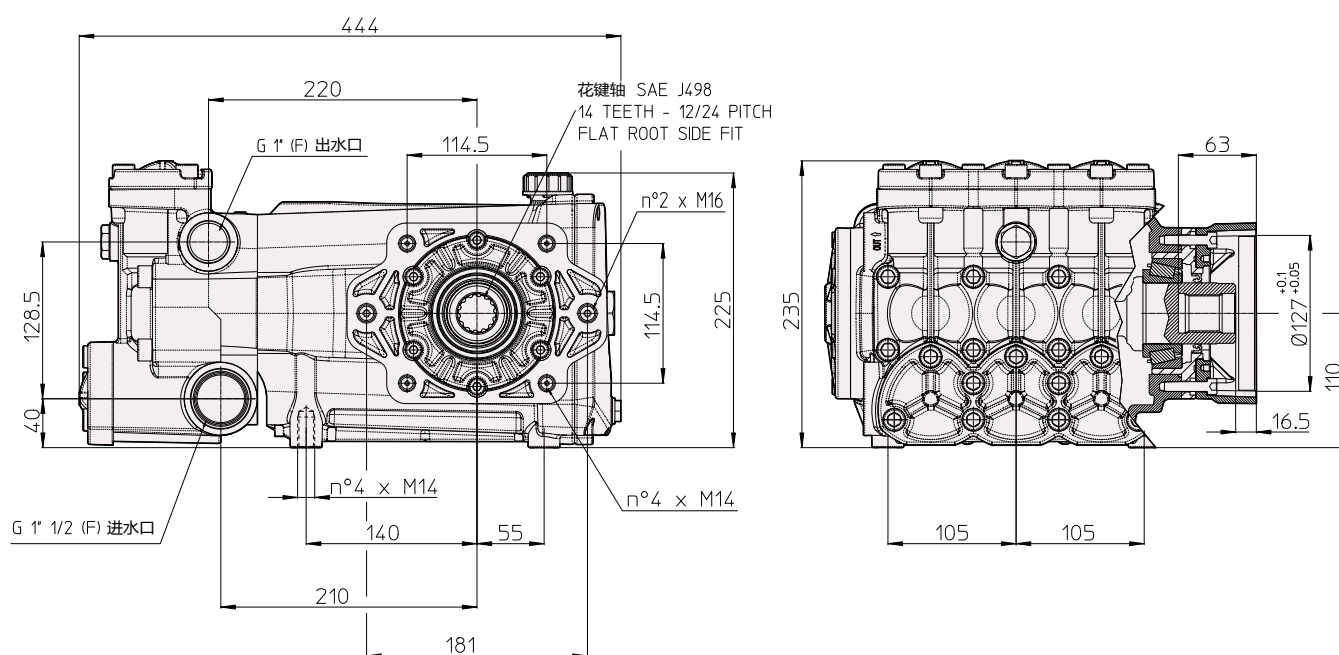

型号	 流量	 压力	电机功率		 重量	 转速	温控阀	进水口	出水口	编号		
	l/min	gpm	bar	psi	hp	kw	kg	rpm	TRV			
RTD+ F57 内花键轴法兰适用于液压驱动												
RTD 80.300+F57	80	21	300	4350	63	47	58	1000	无	1"1/2 GF	1"GF	TBA
RTD 100.200+F57	100	27	200	2900	53	40	59	1000	无	1"1/2 GF	1"GF	TBA
RTD 130.160+F57	130	35	160	2300	53	41	58	1000	无	1"1/2 GF	1"GF	TBA
RTD 160.130+F57	160	43	130	1900	55	41	58	1000	无	1"1/2 GF	1"GF	TBA
RTD+ F57 内花键轴法兰适用于液压驱动												
RTD 200.80+F57	200	53	80	1200	42	31	58	950	无	1"1/2 GF	1"GF	TBA