


RK-SS

VERSION

C







1450_{rpm}

Ø 28 mm

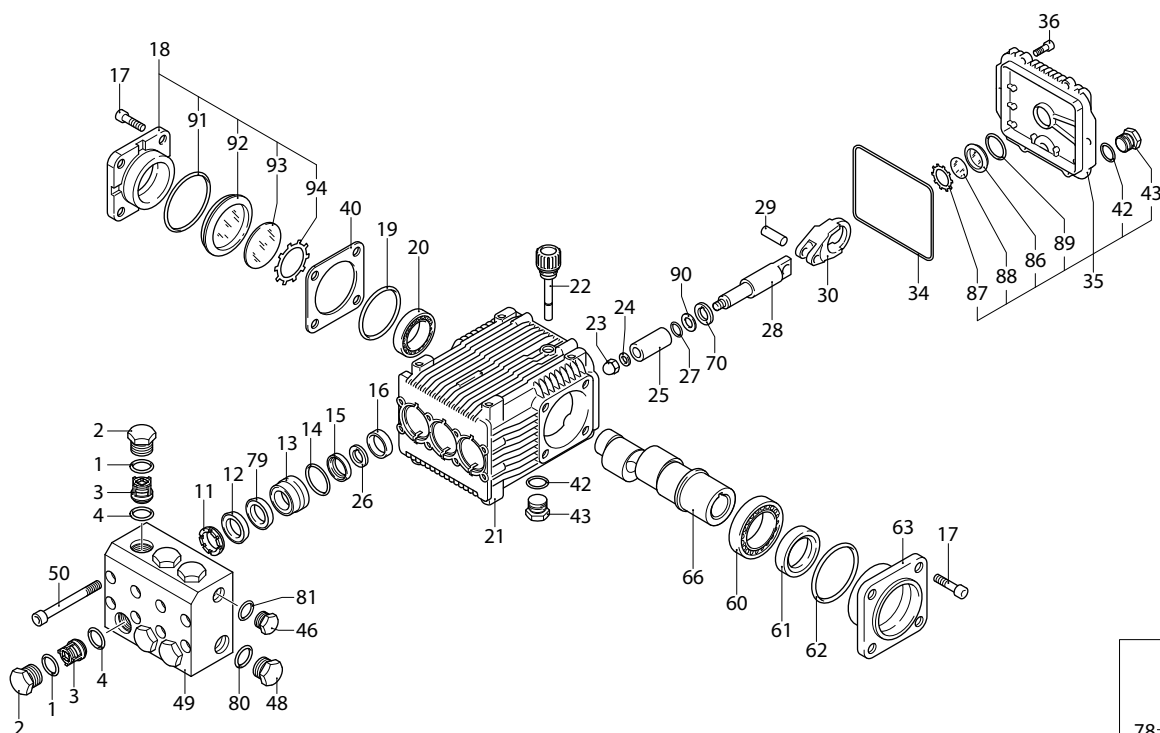

UN003287-DU

PART KITS / 配套零件

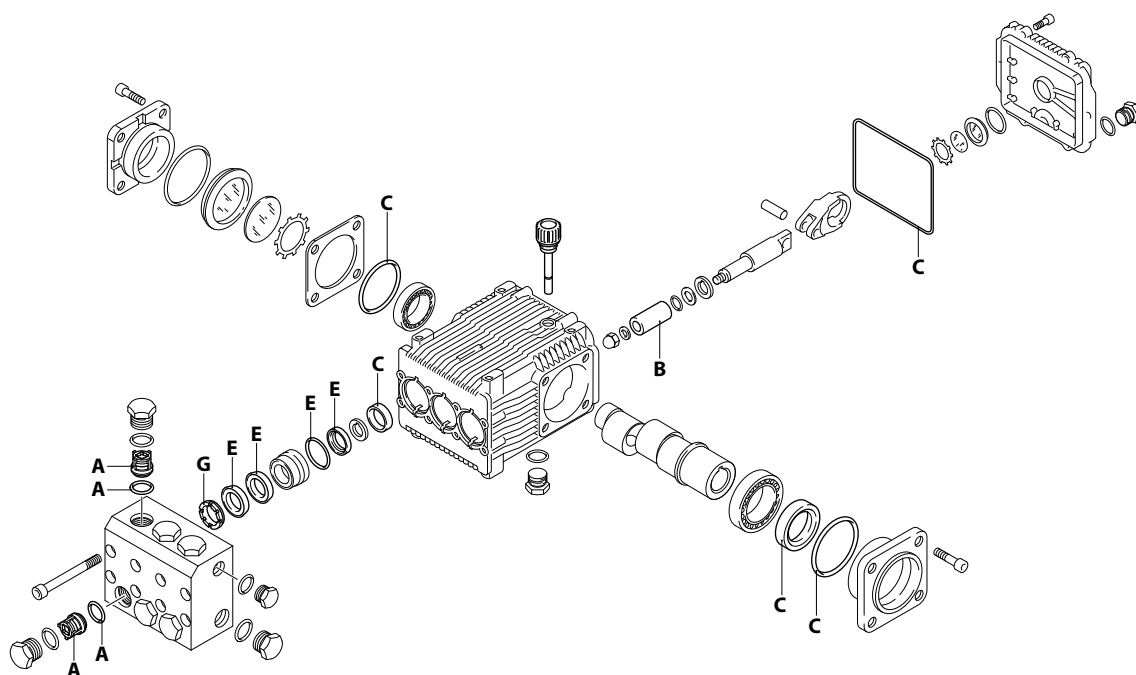

UN003288-DU

234 Series

RK-SS 1450 rpm C version ø 28 m

11.11

13.17

15.15

21.15



Pos. 序号	Cod. 编号	Description	描述	Qt 数量	Note 备注	Pos. 序号	Cod. 编号	Description	描述	Qt 数量	Note 备注
1	960161	O-ring	Ø 17,86x2,62	6		49	2340020	Head	泵头	1	✖ NPT
2	2340030	Plug		6	☛ C=50Nm		2340370	Head	泵头	1	○ □ ■ GAS
3	2349050	Complete valve		6			2340340	Head	泵头	1	✖ GAS
4	880831	O-ring	Ø 15,54x2,62	6		50	1383440	Screw	TCEI M8x70	8	C=24,5Nm
11	960110	Ring	appoggio Ø18	3	○ □ ■	60	1383150	Bearing		1	
12	840320	Ring	appoggio Ø22	3	✖	61	621170	Oil seal		1	(a)
	880321	Gasket	Ø 18	3	○ □ ■ ☛	62	1380220	O-ring	Ø 72,75x1,78	1	
	840331	Gasket	Ø 22	3	✖ ☛	63	2340300	Cover		1	
13	2340140	Piston guide	Ø 18	3	○ □ ■ ☛	66	2280180	Shaft	marcato 5	1	○
	2340420	Piston guide	Ø 22	3	✖ ☛		2280170	Shaft	marcato 3	1	□
14	961241	O-ring	Ø 31,47x1,78	3			2280160	Shaft	marcato 2	1	✖
15	880331	Gasket	Ø 18	3	○ □ ■ ☛		2280150	Shaft	marcato 1	1	■
	2340410	Gasket	Ø 22	3	✖ ☛	70	2340190	Plate		3	
16	1383130	Ring	tenuta	3		78	2349202	Head assembly		1	✖ NPT
17	2340240	Screw	TCEI M8x16	8	C=20Nm / Inox		2349203	Head assembly		1	○ □ ■ GAS
18	2349011	Cover		1			2349205	Head assembly		1	✖ GAS
19	640030	O-ring	Ø 59,99x2,62	2		79	2340310	Ring	antiestrusione	3	○ □ ■
20	2280340	Bearing		1			2340330	Ring	antiestrusione	3	✖
21	2340260	Pump body		1		80	180102	O-ring	Ø 17,5x2	1	
22	880130	Plug		1		81	740291	O-ring	Ø 14x1,78	1	
23	2340060	Nut		3	C=23Nm	86	1260250	Level gauge		1	
24	2340200	Washer		3		87	1260430	Ring		1	
25	1383230	Piston	Ø 18	3	○ □ ■	88	1780690	Plate		1	
	1383340	Piston	Ø 22	3	✖	89	1140450	O-ring	Ø 20,24x2,62	1	
26	2340110	Spacer	Ø 18	3	○ □ ■	90	1080550	Ring	antiestrusione	3	
	2340430	Spacer	Ø 22	3	✖	91	100410	O-ring	Ø 34,6x2,62	1	
27	480482	O-ring	Ø 4,48x1,78	3		92	1941270	Level gauge		1	
28	1383240	Piston	di guida	3		93	1941260	Plate		1	
29	1380060	Pin		3		94	1941290	Ring		1	
30	1383020	Connecting-rod	bronzo	3							
34	1780510	O-ring	Ø 106x3	1							
35	2349010	Cover	completo	1							
36	2340250	Screw	TCEI M6x14	6							
40	1380130	Shim 0.20 mm		1÷3							
42	740290	O-ring	Ø 14x1,78	2							
43	2340350	Plug	3/8" G	2	C=20Nm						
46	2340050	Plug	3/8" NPT	1							
48	2340350	Plug	3/8" G	1							
	2340040	Plug	3/8" NPT	1							
	2340360	Plug	1/2" G	1							

PART KITS - 配套零件

A=KIT 2514 valves 单向阀		B=KIT 2515 ø 18 pistons 柱塞		B=KIT 2526 ø 22 pistons 柱塞		C=KIT 2529 oil seals 油封	
Pos. 序号	Q.ty 数量	Pos. 序号	Q.ty 数量	Pos. 序号	Q.ty 数量	Pos. 序号	Q.ty 数量
3	6	25	3	25	3	16	3
4	6					19	2
						34	1
						61	1
						62	1

E=KIT 2516 ø 18 water seals 水封		E=KIT 2527 ø 22 water seals 水封		G=KIT 1829 ø 18 support rings 支撑环		G=KIT 1816 ø 22 support rings 支撑环	
Pos. 序号	Q.ty 数量	Pos. 序号	Q.ty 数量	Pos. 序号	Q.ty 数量	Pos. 序号	Q.ty 数量
12	3	12	3	11	3	11	3
14	3	14	3				
15	3	15	3				
79	3	79	3				

SIMBOLOGIA - 标记

○ For / 用于 RK-SS 11.11 C □ For / 用于 RK-SS 13.17 C ■ For / 用于 RK-SS 15.15 C ✖ For / 用于 RK-SS 21.15 C

C Tightening torque tolerance 0÷10% / 拧紧力矩公差 0÷10%
 ☛ Screw with Loxeal 55-14 / 用 Loxeal 55-14 螺丝
 ☛ Lubricate with grease Molykote PG54 on the INNER diameter only / 仅在口径内侧用 Molykote PG54 润滑
 (a) Fit the seal with tool code nr. 1781000 / 使用工具 nr. 1781000 进行密封
 GAS Gas thread / Gas 螺纹
 NPT NPT thread / NPT 螺纹

Oil - 机油	
Type / 类型	Quantity / 数量
SAE 75W90	0,415 Kg